

### Replace the bulb

---

#### Warning

---

- When replacing the bulb, be aware that it may have shattered since it has stopped working. If replacing the bulb in a ceiling-mounted projector, take precautions as the bulb may already be broken. When removing the bulb cover, glass fragments may fall. If glass fragments enter the eyes or mouth, seek immediate medical attention.
- Do not disassemble or modify the bulb. Installing and using a modified or disassembled bulb on the projector may cause fire, electric shock, or accidents.

#### Attention

---

- Do not touch the lamp cover immediately after turning off the projector, as it remains hot. Wait a moment before opening the lamp cover until the lamp has cooled down sufficiently. Otherwise, it may cause burns.
- Ensure the bulb and bulb cover are securely installed. Do not turn on the power if not properly installed.
- The bulb contains mercury. Please dispose of used bulbs in accordance with local regulations for fluorescent lamp disposal.

# Lamp Replacement


## Warning

If the lamp stops working and needs replacement, be aware of the risk that the lamp may have shattered. When replacing the lamp of a ceiling-mounted projector, always assume the lamp is broken and exercise extreme caution, stand at the side of the projector, never underneath it.


- 1** Press the power button or main power switch to cut power, then set the main power switch to the "OFF" position.  
\*Wait until the lamp fully cools down (approx. 1 hour).




- 2** Insert the supplied lamp replacement screwdriver into the lamp cover latch, then remove the lamp cover.

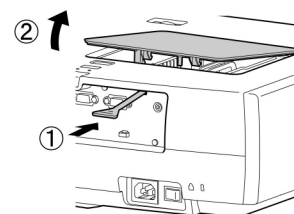

- 3** Loosen the lamp fixing screws.

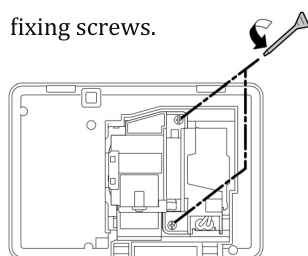


- 4** Remove the old lamp.

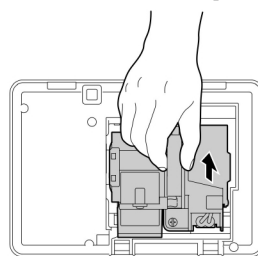


Pull it straight out.

- 5** Insert the new lamp.

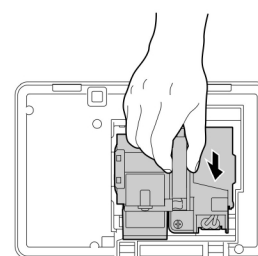


Make sure the lamp faces the correct direction.

- 6** Be sure to tighten the lamp fixing screws securely.

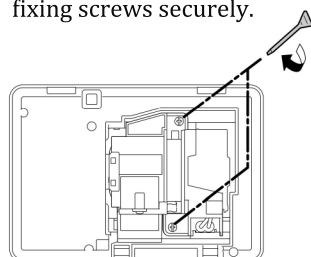

- 7** Install the lamp cover.

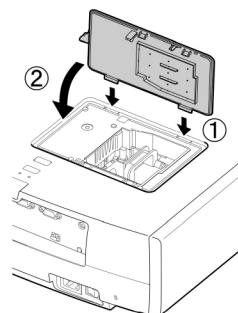

### Notice

- Securely install the lamp and lamp cover. The projector cannot be powered on if the lamp or lamp cover is not installed correctly.
- The lamp module of this product contains mercury (Hg). Consult local regulations regarding disposal or recycling. Do not dispose of it with regular household waste.

Lamp Timer Reset


After replacing the bulb, ensure to reset the lamp timer.

The projector records the bulb operating time and notifies you via message and indicator light when a bulb replacement is needed.

1 Turn on the power

2 Press  button  
Display configuration menu

3 Select Reset –Light time reset  
Display reset confirmation

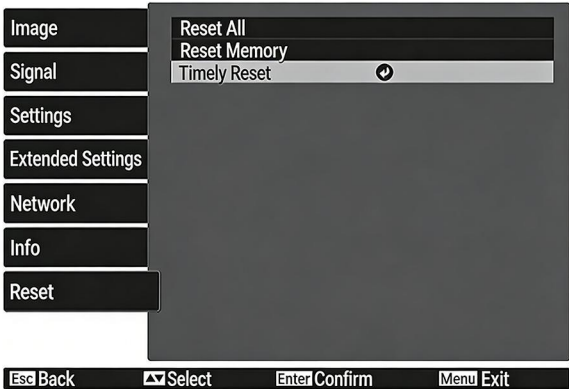

4 Use  Select "Yes" then press 

The light was reset

